




UNIS "GINEX" d.d.



PRIMER 6,53/0,70

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

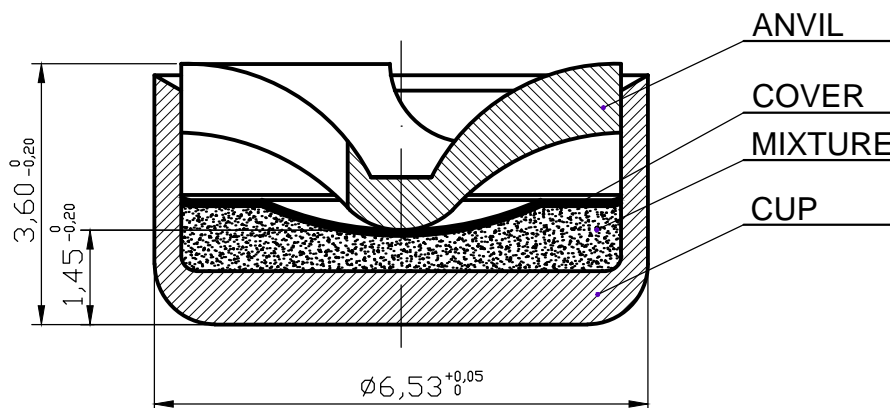

DESIGNED FOR USE IN:		
.338 Lapua Magnum		

TECHNICAL CHARACTERISTICS		
Position	Material identification	Dimensions
Cup	CuZn30	0,71 ⁰ _{-0,02} mm
Anvil	CuZn30	0,91 ⁰ _{-0,03} mm
Cover	Tinfoiled disc	0,05 ⁰ _{-0,02} mm
Primer lacquers	Nitrolacquer red	-
Mixture	Non corrosive, without Hg	0,068 ^{±0,002} g

SENSITIVITY	
Ball weight	111,7 ^{±0,57} g
Upper statistical limit	$\bar{H} + 5S \leq 381$ mm (15")
Lower statistical limit	$\bar{H} - 2S > 76,2$ mm (3")
Firing pin	Ø2mm; R1mm
Testing in cartridge case	7,62 x 54 R

PACKING	
1 000 pcs. of primers packed into carton box	
5 000 pcs. of primers (5 carton box) into intermediate carton box	
30 000 pcs. of primers (6 intermediate carton boxes) into a special (carton or wooden) case	