




UNIS "GINEX" d.d.



PRIMER 12,7-DSK

EN ISO 9001:2015
EN ISO 14001:2015
EN ISO 45001:2018

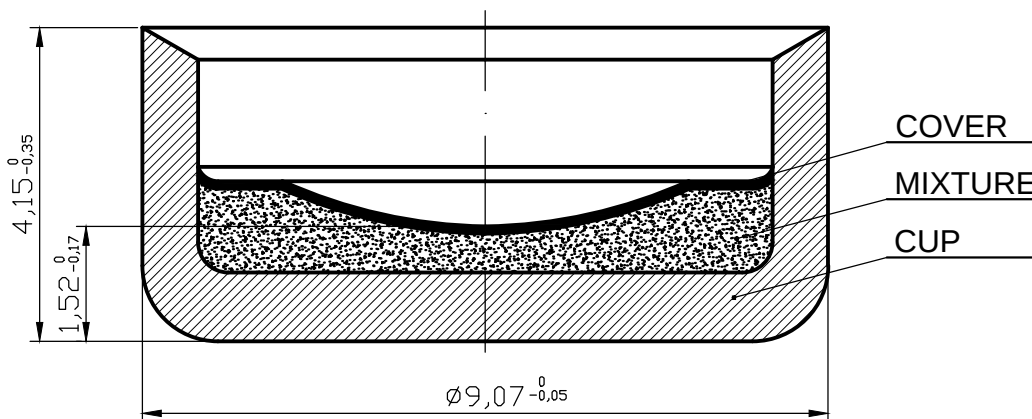

DESIGNED FOR USE IN:		
12,7 DSK		

TECHNICAL CHARACTERISTICS		
Position	Material identification	Dimensions
Cup	CuZn30	$0,93^{+0}_{-0,08}$ mm
Cover	Tinfoiled disc	$0,06^{+0,02}_{+0}$ mm
Primer lacquers	Nitrolacquer red	-
Mixture	Fulminate	$0,117 \pm 0,008$ g

SENSITIVITY	
Ball weight	307 g
Upper sensitivity limit	450 mm
Lower sensitivity limit	100 mm
Firing pin	$\varnothing 3,45$ mm; R2,45mm
Testing in cartridge case	12,7 DSK

PACKING	
1 Carton box	650 pcs.
1 Intermediate box (5 carton boxes)	3 250 pcs.
1 Cardboard case (6 intermediste boxes)	19 500 pcs.

Tel: ++387 38 221 251, Fax: ++387 38 221 402, E-mail: ginexinfo@bih.net.ba
Visegradska bb, 73 000 Gorazde, Bosnia & Herzegovina